




Ergonomic Safety Ladder System for MRO Fleet Service for the Boeing 777 Aircraft



LockNclimb ergonomic safety ladders are specifically designed for each aircraft in the fleet to provide stable working conditions for MRO technicians performing routine maintenance and repair service on the flight line, in the hanger and engine shop.

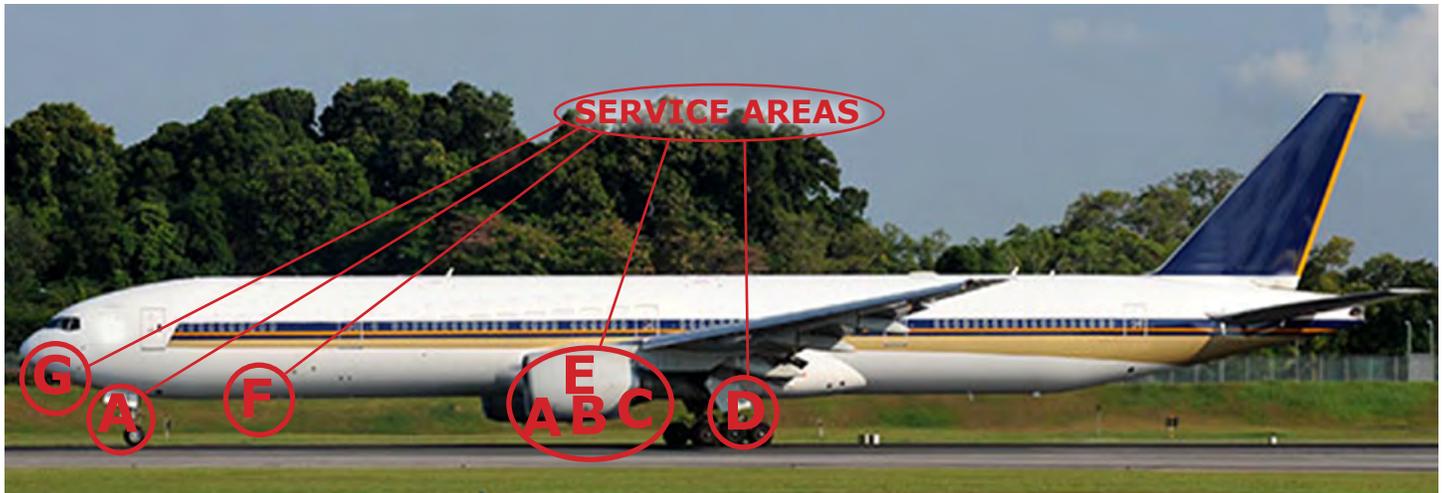

9LNCPYLON 9' Aluminum Pylon Ladder (A)

Free-standing 9' aluminum ladder, 108"L X 32"W, OSHA rated 300-lb. Special Duty. Exceeds ANSI 14.2 specifications. Composed of aluminum construction frame 31" wide with 6061-grade aluminum base with Pylon LockNclimb frame. Commercial grade wheels mounted on sides of pylon. Folding rocker arm assembly for easy storage. Rubber padding on back rails and treads protects aircraft surfaces from damage. Rubber bumpers on side protect ladders from accidental dropping on concrete or pavement surface. Equipped with LockNStands to provide durable comfortable for extended standing. LockNtray tool tray optional. Do Not Stand stickers. **Designed to reach thrust reverser, lower fan cowl and nose gear area.**



11LNCPYLON 11' Aluminum Pylon Ladder (B)

Free standing 10' Aluminum ladder, 132"L X 32"W, OSHA rated 300-lb. Special Duty. Exceeds ANSI 14.2 specifications. Composed of aluminum construction frame 31" wide with 6061-grade aluminum Pylon LockNclimb frame. Commercial grade wheels mounted on sides of pylon. Equipped with removable brass feet to allow easier sliding on concrete and/or apron surfaces. Rubber padding on back rails and treads protects aircraft surfaces from damage. Rubber bumpers on side protect ladders from accidental dropping on concrete or pavement surface. Equipped with LockNStands to provide durable comfort for extended standing. LockNtray tool tray optional. Do Not Stand stickers placed above safe stand area. **Designed to reach thrust reverser and upper fan cowl.**



13LNCPYLON 13' Aluminum Pylon Ladder (C)

Free standing 13' Aluminum ladder, 156"L X 32"W, OSHA rated 300-lb. Special Duty. Exceeds ANSI 14.2 specifications. Composed of aluminum construction frame 31" wide with 6061-grade aluminum Pylon LockNclimb frame. Commercial grade wheels mounted on sides of pylon. Equipped with removable brass feet to allow easier sliding on concrete and/or apron surfaces. Rubber padding on back rails and treads protects aircraft surfaces from damage. Rubber bumpers on side protect ladders from accidental dropping on concrete or pavement surface. Equipped with LockNStands to provide durable comfort for extended standing. LockNtray tool tray optional. Do Not Stand stickers placed above safe stand area. Stickers indicate OSHA/ANSI 14.2 compliance. **Designed to service the exterior fan cowl.**

Boeing 777: 7LNCOPYLON, 11LNCOPYLON, 13LNCOPYLON, 15WWCADET, 15COWLPLYLON, EELITE, EELITE2



15WWCADET 15' Aluminum Wheel Well Ladder (D)

Top rest support 15' aluminum ladder, 180"L X 32"W, OSHA rated 300-lb. Special Duty. Exceeds ANSI 14.2 specifications. Composed of aluminum construction frame 31" wide with 6061-grade aluminum base wheel well frame. Commercial grade wheels mounted on sides of bottom frame allows for easy movement. Rubber padding on back rails and treads protects aircraft surfaces from damage. Rubber bumpers on side protect ladders from accidental dropping on concrete or pavement surface. Equipped with removable brass feet to allow easier sliding on concrete and/or apron surfaces. Do Not Stand stickers placed above safe stand area. Stickers indicate OSHA/ANSI 14.2 compliance. **Designed for service to wheel well and landing gear.**



15COWLPLYLON 15' Aluminum Pylon Ladder (E)

Free-standing 15' Aluminum ladder, 180"L X 32"W, OSHA rated 300-lb. Special Duty. Exceeds ANSI 14.2 specifications. Composed of aluminum construction frame 31" wide with 6061-grade aluminum base Pylon LockNClimb frame. Commercial grade wheels mounted on sides of pylon. Folding rocker arm assembly for easier storage. Rubber padding on back rails and treads protects aircraft surfaces from damage. Rubber bumpers on side protect ladders from accidental dropping on concrete or pavement surface. Equipped with LockNStands to provide durable comfortable for extended standing yellow handrails provide extra safety. Do Not Stand stickers placed above safe stand area. Stickers indicate OSHA/ANSI 14.2 compliance. **Designed for service to top engine parts and electronics.**



EELITE Fiberglass Adjustable Ladder (F)

Designed to allow stable working access to the Electronic Equipment Compartment and to be an all around multi-purpose ground ladder. Lightweight aluminum single section ladders, 60"L x 18"W, OSHA rated 300-lb. 1-A Special Duty. Extends from 72" to 96". Meets or exceeds ANSI 14.5 specifications. Comes complete with patented LockNClimb ladder stabilization system attached comprised of industrial quality 6061-grade aluminum. They allow close ergonomic working access to mechanical parts and fixtures within the ladder rails for easy maintenance. Padding on back top of exterior rails protect sensitive finishes. Weighs only 25 pounds. Easy to carry, set-up, fold and store. **Designed for service to fuselage belly electronic equipment compartment.**



EELITE2 Fiberglass Adjustable Ladder (G)

Adjustable fiberglass ladder, OSHA rated 300-lb. Special Duty, extends from 92" to 138". Meets or exceeds ANSI 14.5 specifications. Composed of two-piece sliding ladder sections constrained by external guide brackets, supported by a 30" wide 6061-grade aluminum base frame. Commercial grade wheels mounted on sides of pylon. Folding connectors for easy transport and storage. Rubber padding on back rails and treads protects aircraft surfaces from damage. Equipped with removable brass feet to allow easier sliding on concrete and/or apron surfaces. Stickers indicate OSHA/ANSI 14.5 compliance. **Designed for service to nose E & E compartment.**



Contact:
Kevin Rookes
Sales Manager Asia
LocknClimb, LLC
2500 West Laurel Street
Independence, KS 67301
kevinr@locknclimb.com
HK Mob +852 9866 1306
CN Mob +86 147 1460 5501